<u>Home</u> ▶ <u>Equipment</u> ▶ <u>Loaders</u> ▶ <u>Mini Track Loaders</u> ▶ MT100

MT100

Mini Track Loader











No need for wheelbarrows, shovels or other hand tools when you roll onto jobsites with the Bobcat® MT100 mini track loader.

- Fit through gates, doorways and other narrow spaces
- 1,000 lb. rated operating capacity
- Powerful breakout force and impressive lift height

Starting at

\$39,284 USD*

Special Offers

Pay as low as 0% for 48 months* or choose a \$1,000 USD*/\$1,300 CAD* rebate on the Bobcat MT100 mini track loader.

Build & Quote

Contact Dealer


View Offers

Find Dealer

Download Brochure

MT100 Overview

- The MT100 travels through gates, doorways and other narrow spaces with ease.
- The machine also delivers a big boost in power with a 1,000-pound rated operating capacity, powerful breakout force and impressive lift height.
- The optimized roller spacing on the MT100's track system improves ride quality for enhanced operator comfort and confidence when working long days.
- Easy, tool-free access to maintenance areas and advanced safety features, including neutral start interlocks, are standard on the MT100 mini track loader, while sealed rollers eliminate the need for daily roller maintenance and decrease downtime.
- This loader also features high-flotation tracks that allow it to move across wet and muddy ground.

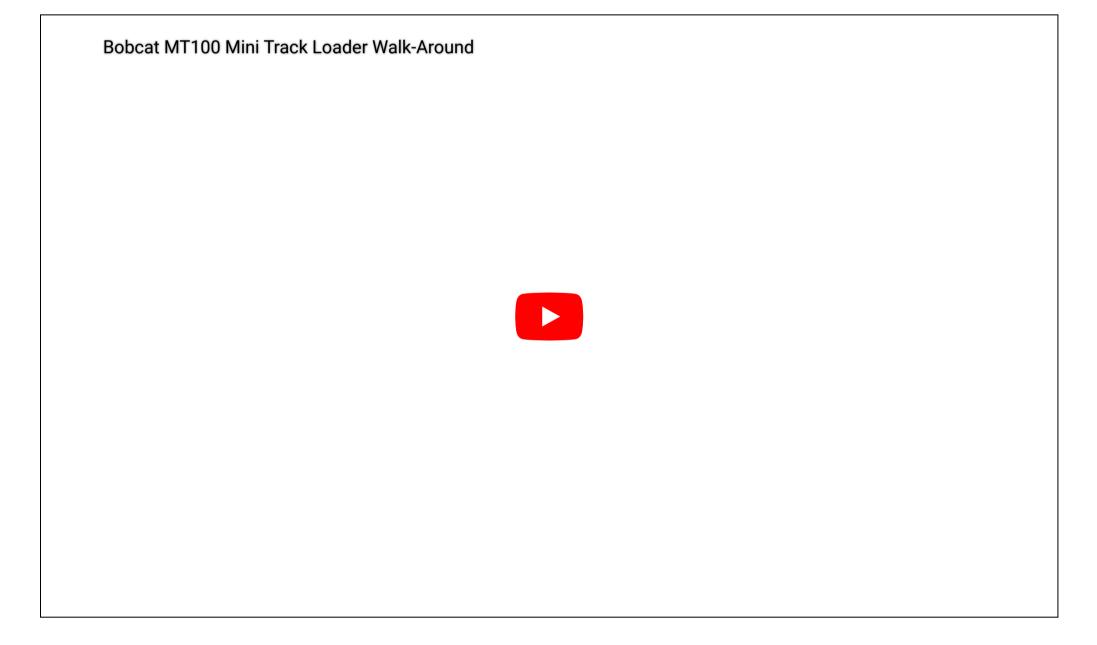

MT100 Specs & Compare

▲ MT100 Key Specifications
MT100
Rated Operating Capacity (ISO)
1,000 lb
Carry Position ROC with Standard Counterweight -UnderCarriage Position
1,300 lb
Operating Weight
3390 lb
Ground Pressure (Rubber)
5.25 psi
Auxiliary Std Flow
12 gal/min
Width
35.6 in
Height to Bucket Hinge Pin
80.9 in
▲ Engine
MT100
Emissions Tier (EPA)
Tier 4
Engine Cooling
Liquid
Engine Fuel
Diesel
Displacement
55 in ³
Number of Cylinders
3
Horsepower
24.8 hp
▲ Performance

1,000 lb

Rated Operating Capacity (ISO)

https://www.bobcat.com/na/en/equipment/loaders/mini-track-loaders/mt100

MT100

Carry Position ROC with Standard Counterweight -UnderCarriage Position
1,300 lb
Tipping Load
2898 lb
Operating Weight
3390 lb
Ground Pressure (Rubber)
5.25 psi
Travel Speed
4.1 mph
Travel Speed - Reverse
2.9 mph
- Capacities
MT100
Fuel Tank
7 gal
▲ Hydraulic System
MT100
Pump Capacity
12 gal/min
System Relief @ Quick Couplers
2,900 psi
Auxiliary Std Flow
12 gal/min
Dimension
MT100
Length
106.2 in
Width
35.6 in
Height
54.6 in
Height to Bucket Hinge Pin
80.9 in
Length of track on ground
41.4 in
Reach @ Maximum Height

18.6 in

▲ Features
MT100
Lift-Arm Support
Standard
Auxiliary Hydraulics
Standard
Spark Arrestor Muffler
Standard
Bob-Tach Attachment System
Standard
Reverse Travel Stop Panel
Not Applicable
Wide Track
Optional
Neutral Start Interlocks
Standard
Lift Arm Lockout With Manual Bypass
Standard
Tilt Lockout
Standard
Built-In Tie Down & Crane/Lift Locations
Standard

REGION SELECTOR NORTH AMERICA (EN)	EMAIL SIGN-UP
BUYING TOOLS	COMPANY
BUILD & QUOTE	ABOUT US
SEARCH INVENTORY	INNOVATION
FIND A DEALER	COMMUNITY
SPECIAL OFFERS	PEOPLE
REQUEST A DEMO	BOBCAT STORIES
CONTACT A DEALER	AMBASSADORS
BUYING RESOURCES	
CONTACT US	LEGAL
CUSTOMER SERVICE	PRIVACY POLICY

Will too will made Educati (Speed at Federice). Education Speed at Federice)						
WEBSITE FEEDBACK				TERMS	& COND	DITIONS
DEALER OPPORTUNITIES				RECALI	LS	
GOVERNMENT SALES						
FREQUENTLY ASKED QUESTIONS						
	G	(O)	Ժ		in	
One Tough Animal.						

DOOSAN

Bobcat Company is a member of the Doosan Group. Doosan is a global leader in construction, grounds maintenance and material handling equipment, power and water solutions, and engineering that has proudly served customers and communities for more than a century.

Bobcat®, the Bobcat logo, the colors of the Bobcat machine and various other product names referenced on this website are trademarks of Bobcat Company in the United States and various other countries.

©2024 Bobcat Company. All rights reserved.